


PS-6TM-1500

Low-profile base for full-size cabins and cockpits - from truck simulators to defense trainers - that fits standard-ceiling rooms a taller platform cannot enter.

 MADE IN POLAND  EUROPEAN UNION MEMBER

 GLOBAL SHIPPING

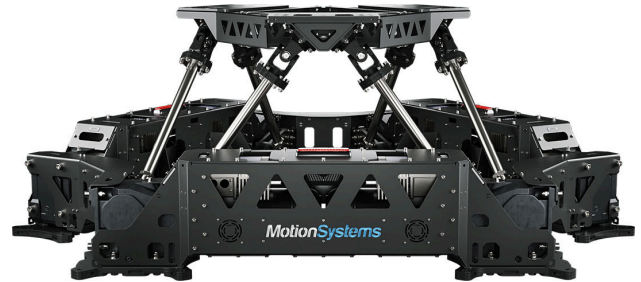

0.61_G

MAX ACCELERATION

300 mm/s

MAX VELOCITY

25.5°

MAX TILT

±24.6°

YAW RANGE

323+ mm

TOTAL HEAVE

Total heave is full travel; other motion figures are per-axis maxima from neutral. Axes are not driven to their extremes simultaneously.

Engineered for professional simulation

1500 kg in a Venue-Ready Base

Defense rooms, OEM facilities and reinforced venues take the flagship payload with forklift or hoist handling - lighter rigging than a tall hexapod needs.

Fits Where a Tall Hexapod Cannot

The integrator wins venue-constrained sites at flagship payload without rebuilding ceilings. More rooms qualify on clearance alone.

Low Acoustic Footprint at Full Load

Instructors brief and debrief beside a full-cabin trainer with no enclosure. Coaching stays at the platform.

Six-leg low-profile platform

Six electric rotary actuators stand in a hexagonal layout: each pairs an electric servo motor with a helical-bevel gearbox, and a pulling rod on ball joints carries that rotation up to the cabin frame. Coordinated drive across the six actuators forms all six axes - pitch, roll and heave plus surge, sway and yaw - in a low-profile build that stays under standard ceiling height.

Plug-and-play for supported titles, or full SDK

- **ForceSeatPM** - platform manager, auto-detects supported titles
- **ForceSeatMI/DI SDK** - integrate motion into custom applications
- **ACE Engine** - professional motion-cueing
- **VR HeadWay** - VR motion compensation

Axis	Single Excursion	Max Excursion	Max Velocity	Max Acceleration
Heave	-143.3 / 180.4 mm	-143.3 / 180.4 mm	300 mm/s	0.41 G
Surge	-213 / 228 mm	-239 / 242 mm	300 mm/s	0.61 G
Sway	-200.5 / 200.5 mm	-236 / 236 mm	300 mm/s	0.61 G
Pitch	-19.7 / 18.2°	-25.5 / 24.8°	35 °/s	250 °/s²
Roll	-20.3 / 20.3°	-21.7 / 21.7°	35 °/s	250 °/s²
Yaw	-22 / 22°	-24.6 / 24.6°	35 °/s	250 °/s²
Payload Specifications				
Payload		1500 kg		
CoG height above MPC		<750 mm		
Moments of inertia (Ixx, Iyy, Izz)		1500 kg·m²		
Main Dimensions				
Total Width		2530 mm		
Total Length		2213 mm		
Min Height		830 mm		
Max Height		1154 mm		
Specifications				
Architecture		6 DOF		
Drive technology		Helical-Bevel Geared		
Product weight		1145 kg		

POWER & INSTALLATION

Supply	400V three-phase $\pm 10\%$ (230V to neutral), 50/60 Hz; the feed is not supplied.
Network type	Wye only, ground and neutral (TN-S).
US supply	US 208V or 480V needs a transformer to reach 400V $\pm 10\%$.
Circuit protection	32A type C circuit breaker.
EMC configuration	EMC input filters fitted as standard for demanding operation in environments with high electromagnetic interference; the drive needs a permanent protective earth, not a standard RCD/GFCI. A filter-free build for RCD/GFCI operation is available on request.
Grounding	High leakage current - permanent solid protective earth, fitted by a qualified electrician.
Installation	Three-phase install by a qualified electrician; full detail in the manual.

POWER DRAW

Average power	11 kVA
Peak power	30 kVA
Average current	16 A/ph
Peak current	43 A/ph
Avg power - stress test	11 kW
Avg power - typical game	4 kW

What's in the Box.

HARDWARE

- ✓ **PS-6TM-1500**
The high-payload six-actuator low-profile platform on helical-bevel geared servos - all six axes for large multi-seat cabins.
- ✓ **PS-SB400 Cabinet**
Power and control - AC/DC protection and controller, on a 400V three-phase supply.
- ✓ **PS-SBR Remote + E-Stop**
The PS-SBR remote (E-STOP, KNEEL, POWER LOCK) and PS-SBEC stop button - the hardware safety chain to park or stop motion. The keyed POWER LOCK keeps arming with the operator; the 5 m PS-SBEC lead adds a stop within reach.
- ✓ **Electromagnetic Brakes**
One safety brake per actuator - engages on power loss and holds the load. A fail-safe, standard here.
- ✓ **Cable Set**
Mains, USB to the host PC, and the PS-SBR remote and EMCY safety leads - wired together as delivered.
- ✓ **Packing & Handling**
Ships factory-assembled and calibrated in a forklift-ready crate - the integrator unpacks and installs, with no on-site build.

SOFTWARE & LICENSES

✓ ForceSeatPM

Auto-detects 154+ supported games with pre-tuned profiles. Included free, with free software updates.

✓ Sim Profiles

Pre-tuned motion profiles for the popular sims and games, so the first session already feels right.

✓ ACE

The motion cueing engine that turns simulator telemetry into felt acceleration – the sharp onset of a bend or brake on the platform, with sustained forces held by coordinated tilt rather than a crude static roll.

✓ VR HeadWay

VR motion compensation that cancels the platform's own movement from the headset, so the view stays stable and motion sickness stays low. Included free.

✓ Docs & 3D Model

Full documentation and a simplified 3D STP model, plus the EC Declaration of Incorporation (2006/42/EC) for partly completed machinery – the platform is integrated into a final machine on site.

✓ 24-Mo Warranty

A 24-month warranty on the hardware and motion electronics, with free software updates throughout.

OPTIONAL HARDWARE

Modular Split for Transport

A factory option that splits the PS-6TM-1500 into transportable modules with reassembly fixings – for tight access or upper-floor installations.

OPTIONAL SOFTWARE AND SERVICES

ForceSeatMI - Motion SDK

Motion SDK to drive the platform from custom software on top of ForceSeatPM. Licensed per motion platform, with the key stored on the PC.

ForceSeatDI - Direct Interface SDK

Low-level SDK that drives the hardware directly, without ForceSeatPM – each platform driven independently, on Windows, Linux or Raspberry Pi. Licensed per platform, with the key stored on the motion controller.

Remote Training (online)

Six-hour online session – overview, safety, operation, maintenance, ForceSeatPM setup, diagnostics and tuning. Per session.

VR HeadWay CrossPC

A paid VR add-on, licensed separately from the base VR HeadWay. One CrossPC license covers exactly two VR users on a shared platform – each seat has its own rendering PC and geometry-correct compensation (for example pilot and copilot). More seats need an additional license.

Motion Theater

Plays pre-authored motion with video or group sessions – for theaters, attractions and briefings, not live sim. Per platform.

More Options

Profile packs, installation, reports, extended warranty and bespoke development – talk to the Motion Systems team to tailor it.

MOTION SYSTEMS

Miedziana 7, 55-003 Nadolice Wielkie, Poland

motionsystems.eu

info@motionsystems.eu

Made in Poland (EU)



PRODUCT

RESOURCES

All platforms

Knowledge Hub

Buyer's Guide